OOB SMARTHOME
Touch The Future TODAY

SMART DOORLOCK

OOBDLS2

www.oobsmarthome.com

UNIQUE FEATURES

OOB SMARTHOME
Touch The Future TODAY

FAST FINGERPRINT SENSOR
50 fingerprints can be registered in this lock and unlocking speed is 0.5 seconds only.

RFID CARD
300 RFID card can be registered in this lock, the RFID card is specially designed for this lock only for your security.

PIN OPTION WITH VERY FINE TOUCH KEY PAD
You can register 100 pins in this lock and the Touch Key Pad is very fine to Use.

LOW BATTERY INDICATION
The lock will give you an indication on the screen that the battery is low.

RECORD HISTORY
You can Check Past Unlocking Records.

EMERGENCY POWER
In case the battery is completely discharged, an external 5VMicro USB type cable can be used to give power to the lock.

AUTO LOCKING SYSTEM
The lock will eliminate the manual locking as it will get locked automatically when the door gets closed.

www.oobsmarthome.com

PRODUCT PARAMETER

OOB SMARTHOME
Touch The Future TODAY

- Power Supply : **4.5V-6V (4 pcs AA Cell power)**
- Unlock Methods : **Fingerprint / RFID card Passcode / Mechanical Key**
- Quiescent Current : **<50-65uA**
- Passcode Length : **6-8 Bits**
- Card Volume : **100 pcs**
- Password Volume : **100 pcs**
- Finger Volume : **50 pcs**
- Administrator : **9**
- Lower Voltage Alarm : **4.5+0.2V**
- Operating Temperature : **-10 C~60 C**
- Door Thickness : **38-120mm**
- Material : **Aluminium Alloy**
- Size : **358*70MM**

www.oobsmarthome.com

USER MANAGEMENT

1. Initialization

Press the set button (rear panel button) for 5seconds. Voice will remind Initialization successfully.

Note: Initialization password is: 123456, or any fingerprint can unlock the lock.

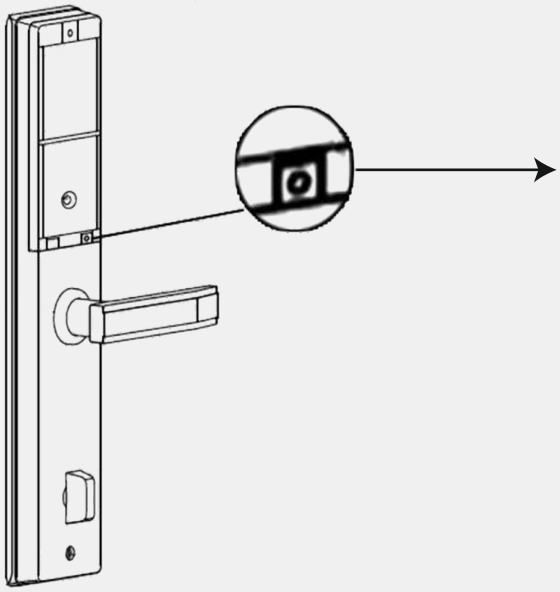

Long press the back lock setting key, the countdown is over in 5 seconds, release and restore the factory setting successfully

2. Add administrator information (Up to three administrator users)

In the initialization state to wake up the screen press “* #”

↓

When add successfull, voice prompt "add administrator successfully" (can continuously add 9 times)

→ Voice prompt “Please add administrator information” (administrator can be fingerprint password or ID card)

USER MANAGEMENT

3. Add General User Information

Click touch panel - press-press*#

Voice prompt Please verification administrator information

After verification successfully, voice prompt
1. WL Setting
2. Lock Function

Voice prompt
1. Add users
2. Delete the user,
3. Door lock function,
4. Add an administrator user

Input 1 enter into the add users mode voice prompt please enter the unlock information (system will add automatically in sequence)

4. Delete unlock information

Click touch panel - press * -press*#

Voice prompt Please verification administrator information

After verification successfully, voice prompt
1. WL Setting
2. Lock Function

Voice prompt
1. Add users
2. Delete the user,
3. Door lock function,
4. Add an administrator user

Input 2 enter into delete users mode, voice prompt please enter the delete code

5. Normally unlock mode

Click touch panel - press * - press*#

Voice prompt Please verification administrator information

After verification successfully, voice prompt
1. WL Setting
2. Lock Function

Voice prompt
1. Add users
2. Delete the user,
3. Door lock function,
4. Add an administrator user

Input 3 voice prompt normally open mode turned on normally open mode turned off

Note: After the normally open mode is turned on, every unlocking is normally open mode, and the lock will not be automatically closed, so it is necessary to manually unlock the lock once.

Semi installation diagram

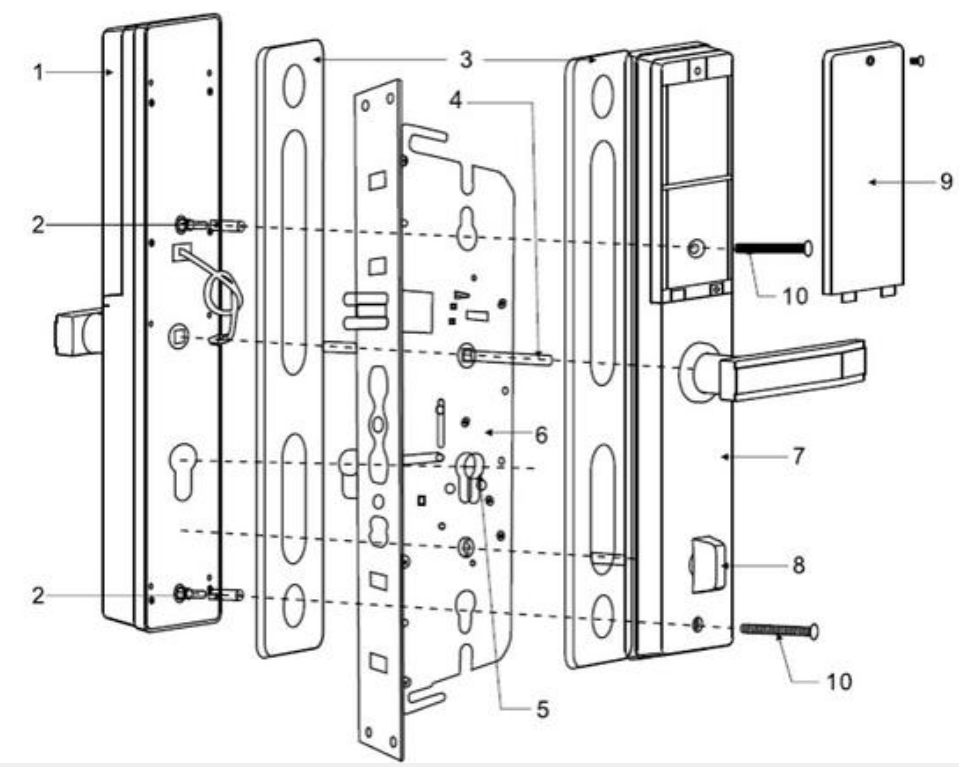

1. front panel
2. connecting pipe
3. silicone pad
4. Fangxin
5. lock cylinder
6. lock body
7. Rear panel
8. Indoor locking knob
9. battery cover
10. Screw-fitting.

Note: When installing semi-automatic lock, adjust the clutch and direction of handle according to the direction of door opening.

OOBDLS2

OOBDLRxTx

For VDP - RF Chip Tx Rx Pair

OOBDLWF

For Application - WI-FI Chip

Interior
Exterior
4 AA Battery
Battery cover
Handle
Safety Stoper
360 MM
Password
RFID Card
Doorbell
Fingerprint
Handle
Emergency Power
Normal key
70 MM
70 MM

DRILLING TEMPLATE

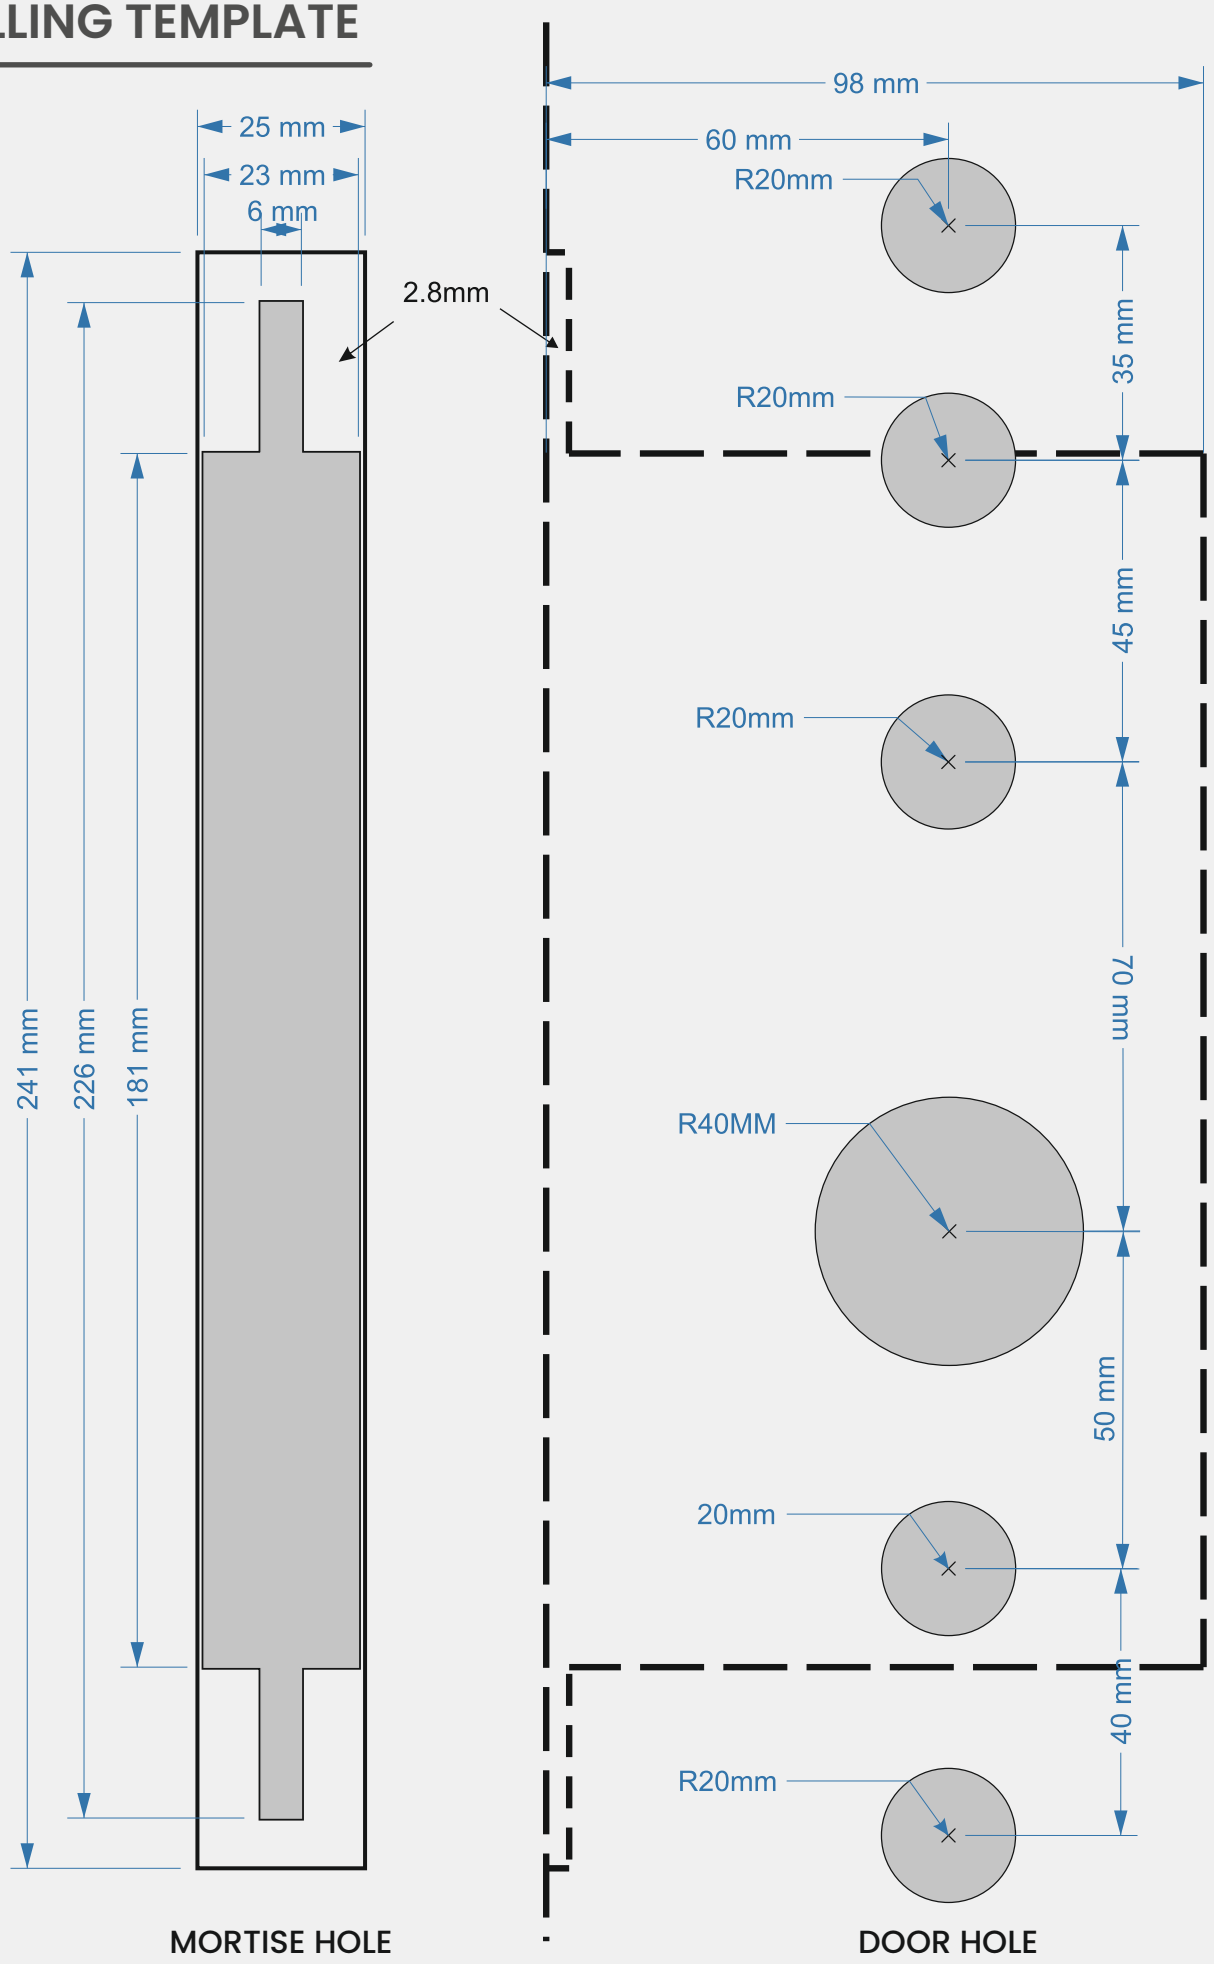

DOOR THICKNESS

Suitable Door Thickness

Minimum - 35mm

Maximum - 65mm

OOB®
SMARTHOME
Touch The Future TODAY

www.oobsmarthome.com

OOB SMARTHOME INDIA PVT. LTD.

B-408, Shantiniketan Business Center,
Nr. Domino's Pizza, Gangotri Circle, Nikol
Ahmedabad - 382350, Gujarat, INDIA.

M :+91 90 81 87 87 89 | E : reach@oobsmarthome.com

Available On

Follow Us

Recognized & Trusted By

VERSION V3