OOB®
SMARTHOME
Touch The Future TODAY

SMART DOORLOCK

OOBDLS5

www.oobsmarthome.com

UNIQUE FEATURES

OOB SMARTHOME
Touch The Future TODAY

FAST FINGERPRINT SENSOR
Up to 100 fingerprints can be registered in this lock and unlocking speed is 0.5 seconds only.

RFID CARD
Up to 250 RFID card can be registered in this lock, the RFID card is specially designed for this lock only for your security.

PIN OPTION WITH VERY FINE TOUCH KEY PAD
You can register up to 250 pins in this lock and the Touch Key Pad is very fine to Use.

DOOR BELL
There is an inbuilt doorbell in this lock.

LOW BATTERY INDICATION
The lock will give you an indication on the screen that the battery is low.

RECORD HISTORY
You can Check Past Unlocking Records.

EMERGENCY POWER
In case the battery is completely discharged, an external 5VMicro USB type cable can be used to give power to the lock

AUTO LOCKING SYSTEM
The lock will eliminate the manual locking as it will get locked automatically when the door gets closed.

CAMERA & DISPLAY
You can see the visitor in display trough camera which install in front panel of lock! lock with 3.5" larger rear display inside & HD 1.3 MP camera.

FACE LOCK
You can unlock This lock with your Face with the help of 3D camera Technology.

www.oobsmarthome.com

PRODUCT PARAMETER

OOB SMARTHOME
Touch The Future TODAY

- Power Supply : **4200 mA, 7.4 V Lithium Battery**
- Unlock Methods : **Fingerprint / RFID card Passcode / Mechanical key / OOB APP**
- False Reject Rate : **<0.15%**
- False Accept Rate : **<0.00004%**
- Static Current : **<90uA**
- Work Current : **<300MA**
- Passcode Length : **6-8 Bits**
- Fingerprint Volume : **295pcs**
- Passcode Volume : **295pcs**
- RFID Card Volume : **295pcs**
- Administrator : **1~5**
- Face Volume : **100pcs**
- Operating Temperature : **-20 C/+60 C**
- Operating Humadity : **20%-90% RH**
- Door Thickness : **38-120mm**
- Material : **Zinc Alloy**
- Size : **420*75MM**

www.oobsmarthome.com

INITIAL STATE

1. Any fingerprint, swipe card or password can open the lock in the initial state.

2. After entering the administrator information, the unrecorded fingerprint RFID card or password cannot open the lock.

3. Enter the lock function management

   I. First **PRESS * & #** Key, enter the administrator password / RFID card / Fingerprint.

(Factory default password: 123456) to verify the administrator. According to the voice prompt:

   II. After "administrator setting", will be prompted "please enter administrator information" After administrator verification, manage the function.

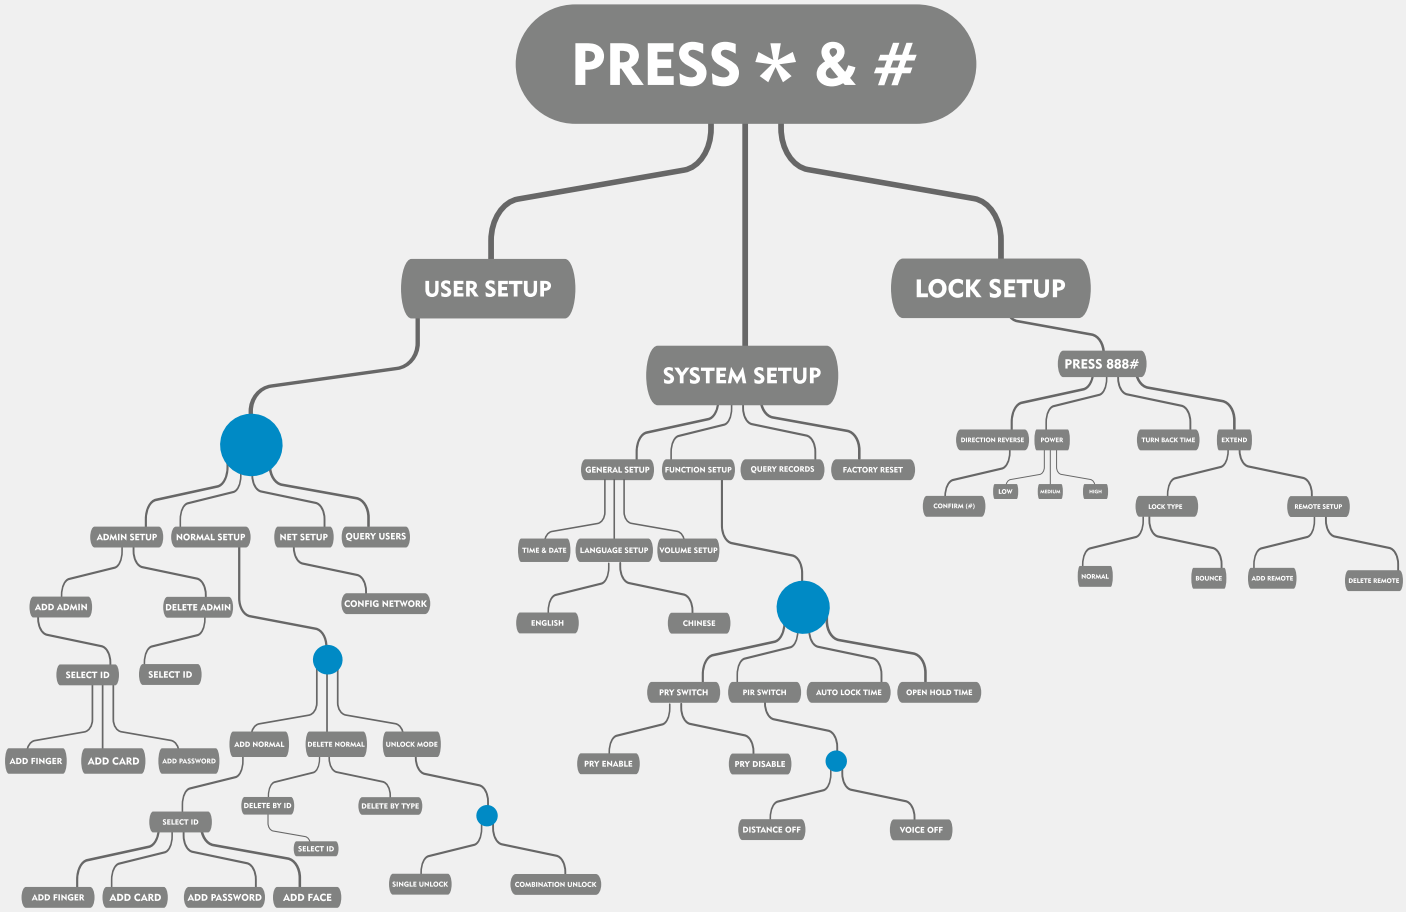

USER MANAGEMENT

Adding administrative users (For new Locks or after restoring the system)



Note: During the entry process, fingerprint needs to be entered 5 times password Entry digit is 6-8 Digits after the entry is completed, press the "*" Key to return back to the previous level Menu or exit.

1) Entry Of Administrative Users (there are already administrative Users)

2) Add Normal

3) Net Setup

4) Query Setup

USER MANAGEMENT

1. General Setup

I. Time & Date

II. Language Setup

III. Volume Setup

2. Function Setup

I. PRY Switch

II. PIR Switch

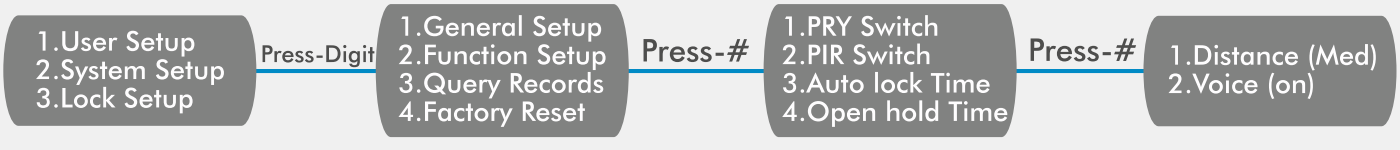

III. Auto lock Time

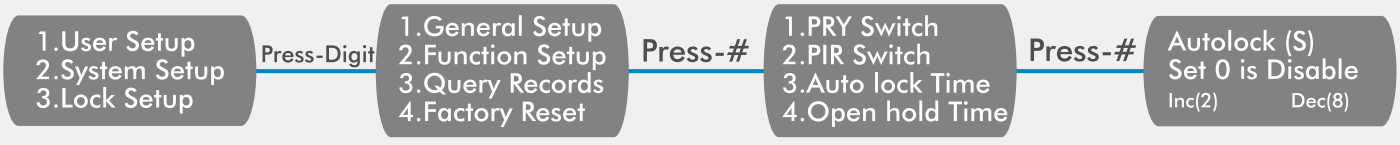

USER MANAGEMENT

IV. Auto Hold Time

3. Query Records

4. Factory Reset

4.1. Press and hold the unlock key and lock key at the same time and restore factory settings successfully after five rings

4.2. After the system wakes up, press *# Key to enter the system menu, Select system setting, Press# to confirm the initialization Success.

5. Factory Reset

I. DIR Reverse

II. Power Setup

USER MANAGEMENT

III. Turn Back Time

IV. Extend 1) Lock Type

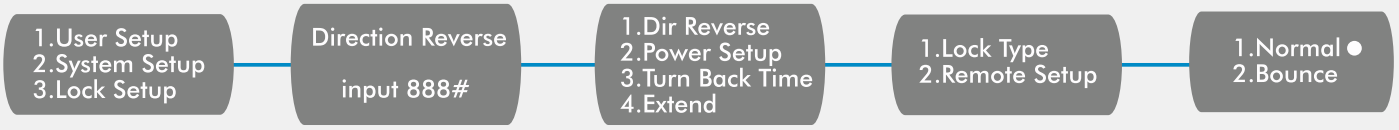

IV. Extend 2) Remot Setup

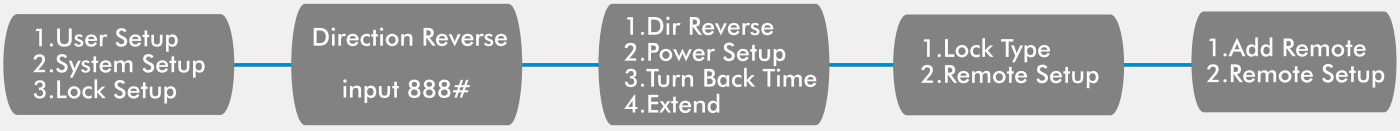

APPLICATION

App Remote Unlock

I. Download "Smart life " from App store / Play store

II. User registration / login for the first time, you need to register a user, enter a mobile phone number or email address to register users: if have account user can login in directly.

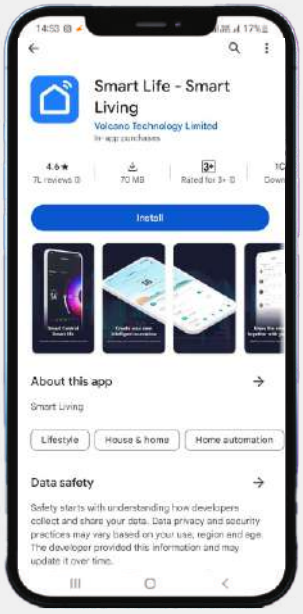

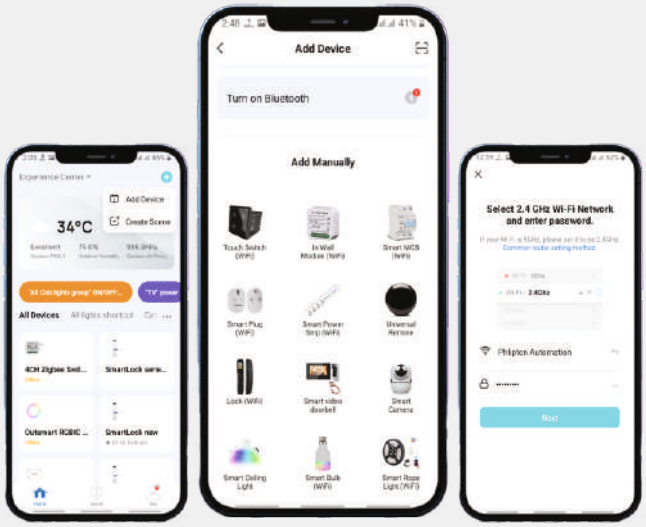

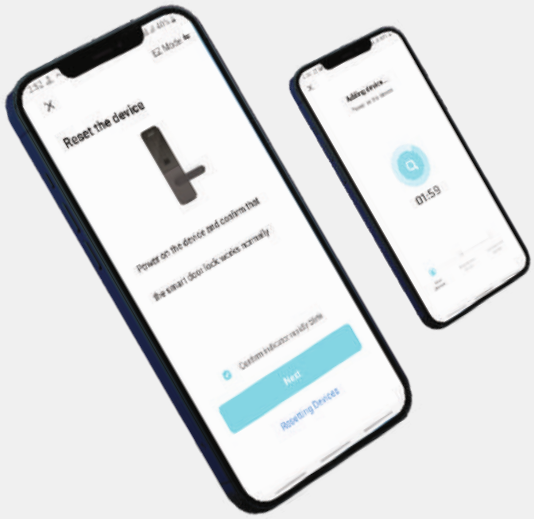

APPLICATION

Net Config

1.User Setup
2.System Setup
3.Lock Setup
→ Press-Digit → 1.Admin Setup
2.Normal Setup
3.Net Setup
4.Query Users
→ Press-# → Config Net → Press-# → Config Net 40

III. After log in, Click "ADD"----"Add Wi-Fi Device "

Add Device → Security Sensor → Lock (Wi-Fi) → Internet and input Password → Fast Flash (0.5s/1) → No → Searching Device

IV. Remotely Unlock: Press "Doorbell" icon, Voice prompt: remotely unlock asking send the remote unlocking message real time, and upload the picture to your mobile App

V. Message Prompt and manage the message send to your mobile in real time unlocking logs fully recorded.

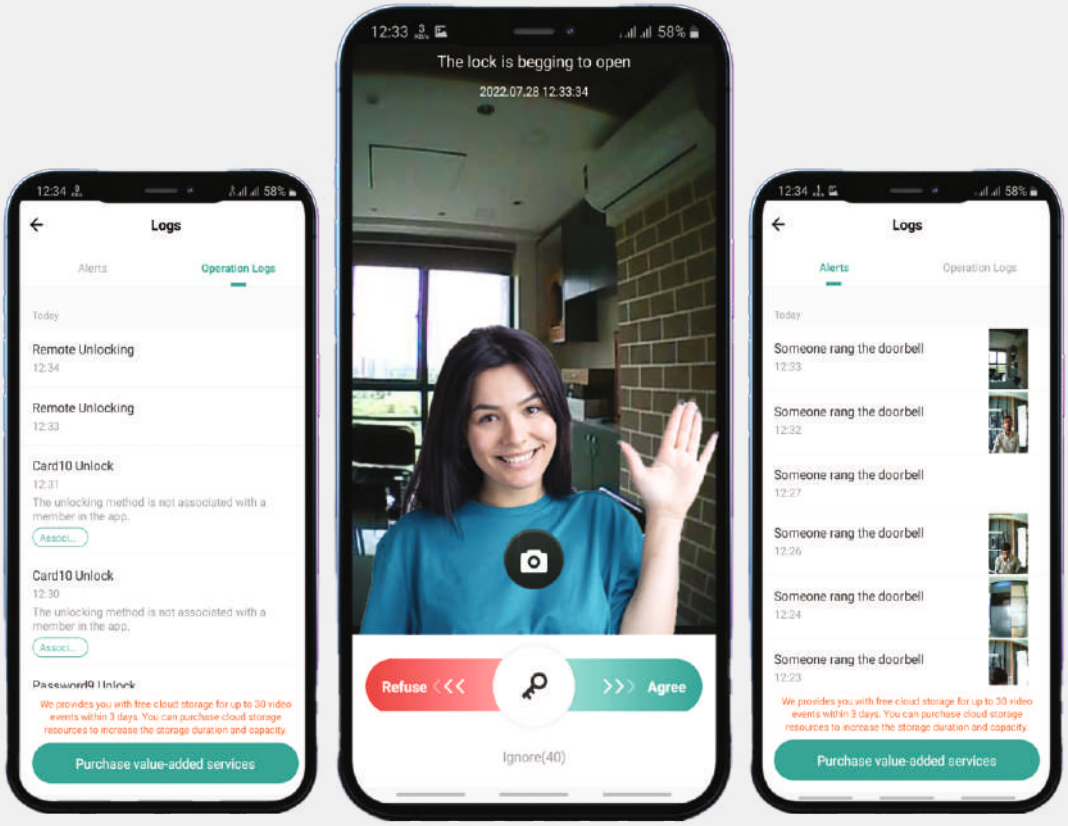

OOB®
SMARTHOME
Touch The Future TODAY

www.oobsmarthome.com

OOB SMARTHOME INDIA PVT. LTD.

B-408, Shantiniketan Business Center,
Nr. Domino's Pizza, Gangotri Circle, Nikol
Ahmedabad - 382350, Gujarat, INDIA.

M :+91 90 81 87 87 89 | E : reach@oobsmarthome.com

Available On

Follow Us

MAKE IN INDIA

Recognized & Trusted By

RoHS compliant UQ-2021090934

UQ-3514

VERSION V3